


### RADIUS OPTION

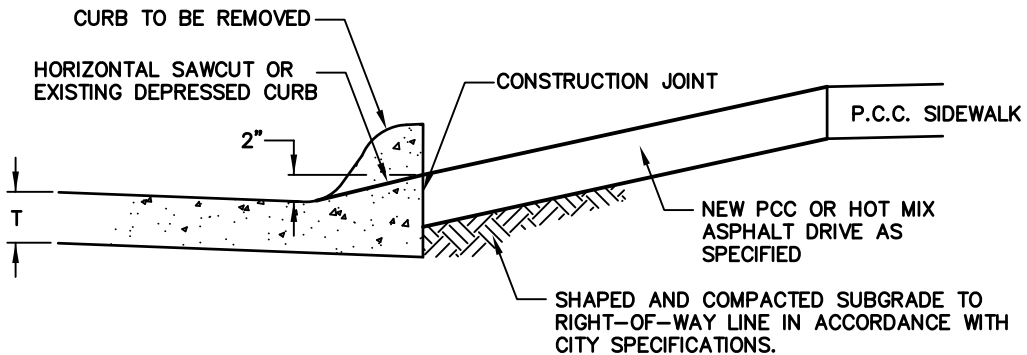

#### NOTES:

- 1.) DRIVEWAY APRON THICKNESS REQUIREMENT IS 6" PORTLAND CEMENT CONCRETE (W/ REINF. FABRIC) ON COMPACTED EARTHEN BASE OR 4" HOT MIX ASPHALT ON 6" COMPACTED CRUSHED STONE TO PROPERTY LINE.
- 2.) CONCRETE FOR SIDEWALK AND STREET PAVEMENT TO MEET CITY SPECIFICATION.
- 3.) REMOVAL OF CURB NOT PERMITTED WITHOUT PRIOR APPROVAL BY CITY ENGINEER.
- 4.) SEE "DRIVEWAY APRON-RESIDENTIAL/COMMERCIAL TYPE A" FOR STRAIGHT-TAPER OPTION.